


B


VS 10-75 CG uPC (AHU VS 21-75)
VS 40-150 CG uPC SUP-EXH
VS 180-300 CG uPC
VS 400-650 CG uPC

APPLICATION: AR4160 / AR4288

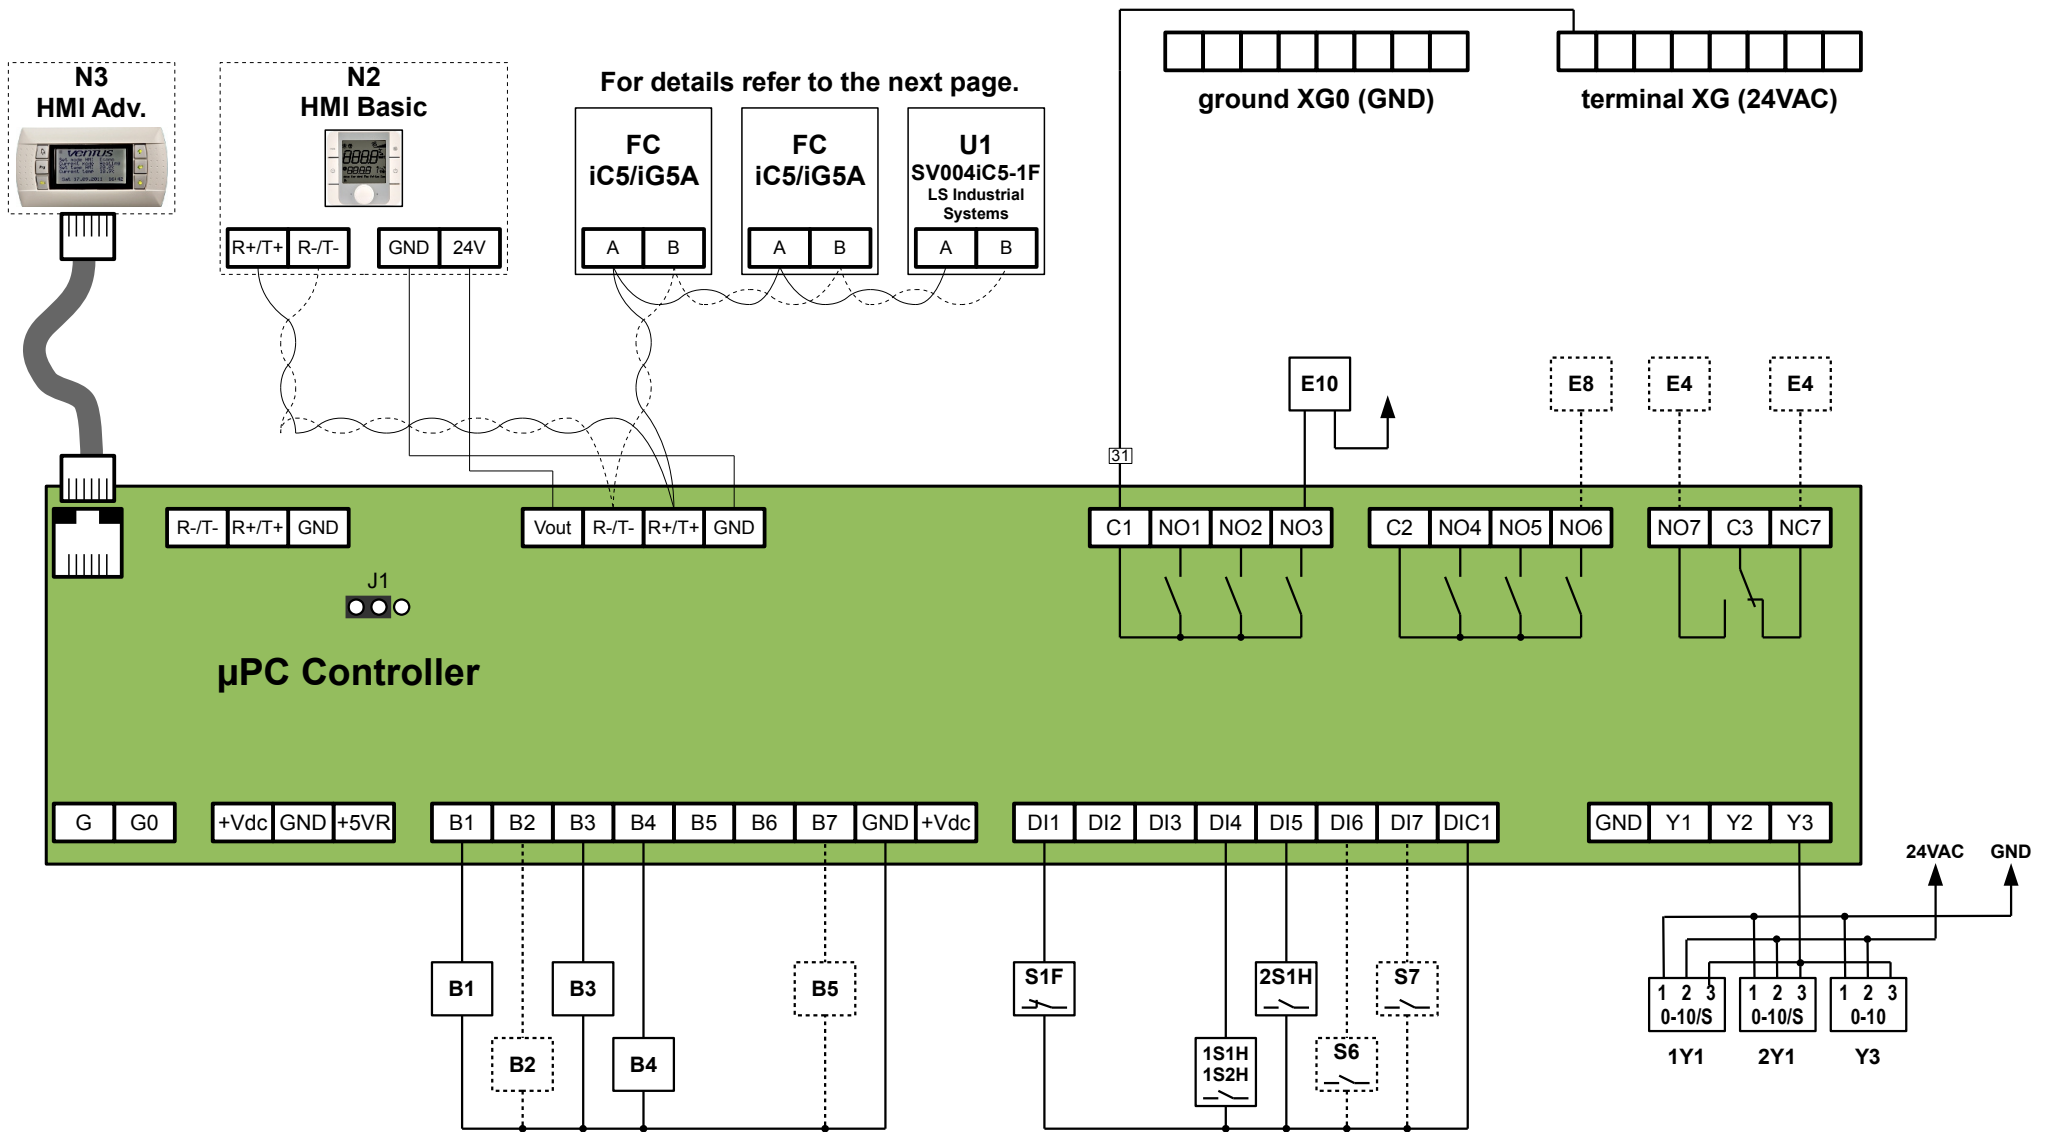

B

MODBUS CONNECTION

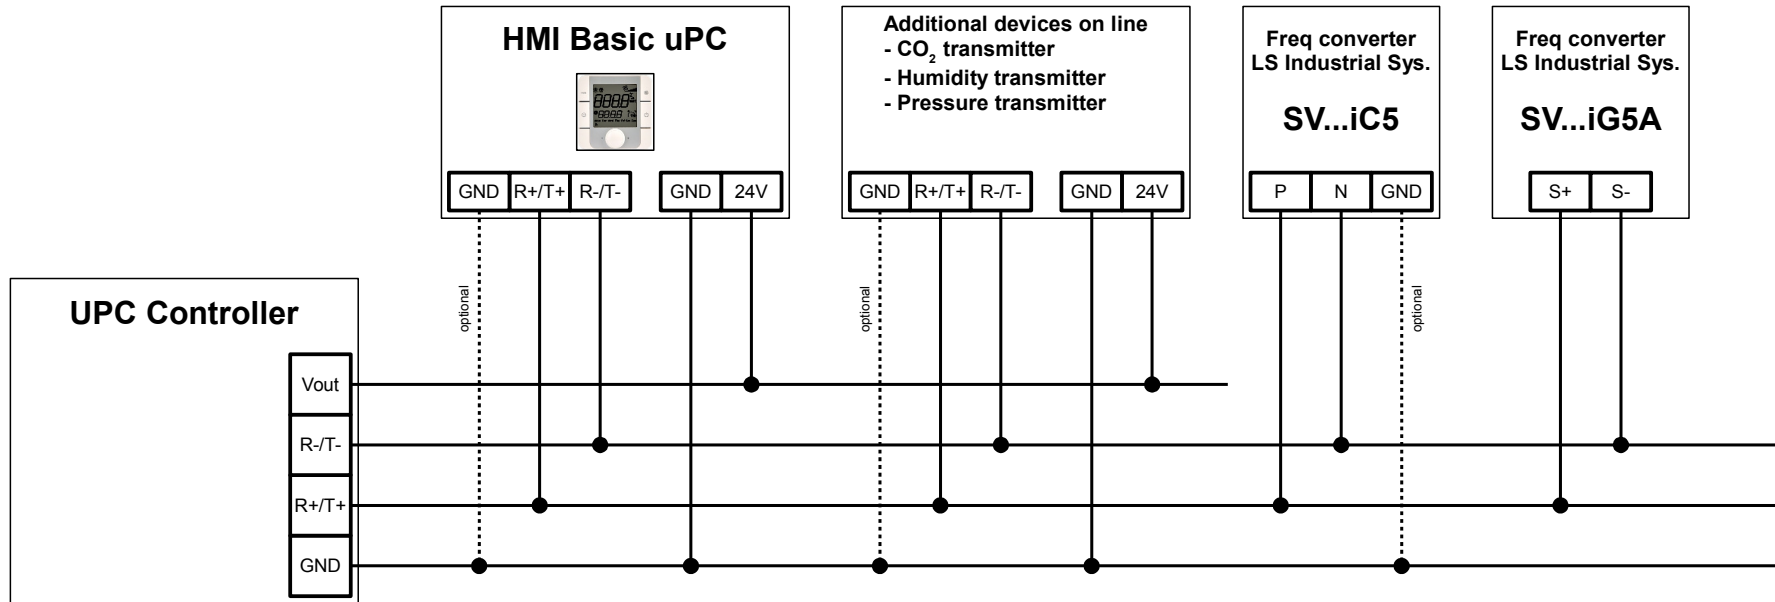

SENSOR B2

| | HMI Basic uPC = YES | HMI Basic uPC = NO |
|-----------------|---------------------|--------------------|
| App.Code A...-S | ✗ | ✗ |
| App.Code A...-R | ✗ | B2 ✓ |
| App.Code A...-E | B2 ✓ | B2 ✓ |